

HIGH TEMPERATURE SOLUTIONS FURNACE OPERATIONS & REPAIR



OUR COMMITMENT TO ENGINEERING EXCELLENCE

Elmet Technologies complex product fabrication capability delivers superior quality with material consistency and product reliability. Elmet Technologies achieves world class quality through continuous research of new products, development of engineering solutions, and continuous improvements in Elmet Technologies' manufacturing environment to deliver premium products for the most challenging applications.

Nearly 100 years of powder metallurgical experience is the cornerstone of Elmet Technologies' success in producing advanced technology metals for fast growing industries including aerospace, chemical processing, electronics, industrial, medical, and energy. As one of the world's leading suppliers of molybdenum, tungsten, tantalum, niobium, and their alloys, Elmet Technologies is at the forefront of creating solutions with next-generation materials and fabricating engineered components for a diverse spectrum of markets.

> Product Quality and Service > Manufacturing Excellence

> Research and Development > Reclamation and Recycling



RECYCLING STRATEGIC ADVANTAGES OF WORKING WITH ELMET TECHNOLOGIES

Elmet Technologies understands market trends and the latest cutting-edge technologies are providing us the opportunity to create value added solutions for complex applications. In addition, our robust and sustainable, vertically integrated supply chain enables us to deliver high performance materials and products seamlessly to the marketplace. Paramount to Elmet Technologies is securing materials from reliable sources. Our raw material procurement relies on the continuous expansion of our recycling activities and the fair, conflict-free and sustainable procurement of raw materials.

A recognized leader in refractory metal technology, Elmet Technologies' knowledge and technical expertise benefit customers through joint collaborations with our dedicated team of research engineers. This collaborative effort facilitates new and improved product designs through a study of the product's life-cycle. Extensive in-house state-of-the-art laboratory facilities with the latest in analytical tools, testing equipment, modeling and simulation software assist engineers in evaluating product performance. For example, innovative material solutions provide texture control thus enhancing the uniformity and performance consistency.

Elmet Technologies offers exceptional customer care with sales and technical support.

FABRICATING PRODUCTS WITH HIGH TEMPERATURE MATERIALS


Fabricated product solutions from Elmet Technologies service a wide spectrum of markets, industries and applications including vacuum heat treating, sintering, annealing, brazing, and all high temperature furnace applications in the medical, aerospace, defense and automotive industries.

As an example, heat treating large aerospace parts in vacuum furnaces, or running high volumes of production parts for brazing through controlled atmosphere furnaces, and annealing medical and aerospace products to critical specifications, all require high temperature materials with superior mechanical and physical properties.

Molybdenum, tungsten, niobium and alloys such as MoLa (molybdenum-lanthanum), TZM, MHC, and MoW (molybdenum-tungsten) are perfect for the heat treating and furnace markets. These high temperature refractory metals are characterized by their mechanical durability, high ductility and toughness, high thermal and electrical conductivity, low coefficient of thermal expansion, and excellent strength and stability at temperatures up to 2000 °C.

Customer specific furnace components and fixtures are uniquely designed and supplied by Elmet Technologies. We machine and fabricate products from rod, plate, sheet, and foil.

- > [Furnace Assemblies](#)
- > [Hot Zones](#)
- > [Flat Ribbed Heating Elements](#)
- > [Furnace Racks](#)
- > [Boats & Trays](#)
- > [Heat Shields](#)

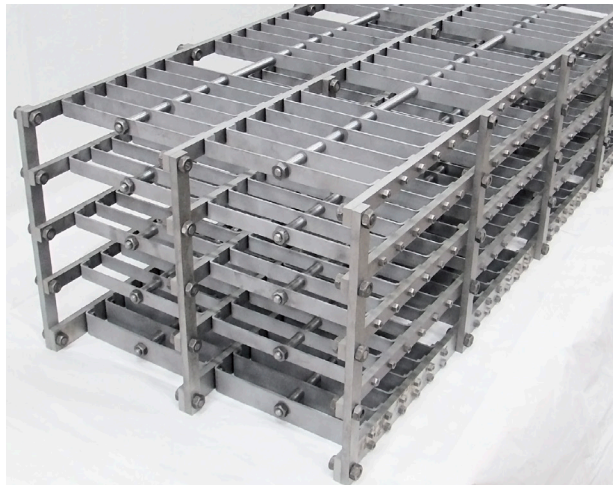

FURNACE APPLICATIONS AND OPERATIONS

Our high temperature refractory metal materials and components are utilized in furnace applications and supplied to OEMs, end-users, and aftermarket manufacturers. The major parts of the furnaces that utilize refractory metals are heating elements with their auxiliary components like hangers, supports and feed-throughs, and heat shields with their own auxiliary components like rivets, staples, and separators.

Elmet Technologies' refractory materials serve the following furnaces:


- > High temperature furnaces in vacuum, reducing or inert atmospheres
- > Chemical reaction furnaces in vacuum, air, or various atmospheres

Industrial Furnace Operations

- > Annealing
- > Brazing
- > Heat Treating
- > HIPing
- > Melting
- > Pre-heating for Metalworking
- > Powder Processing
- > Sintering
- > Tempering
- MIM (Sintering/Debonding)

Industries Served

- > Automotive
- > Aerospace
- > Defense
- > Energy
- > Medical
- > Nuclear Fuel
- > Crystal Growth
- > Waste Treatment

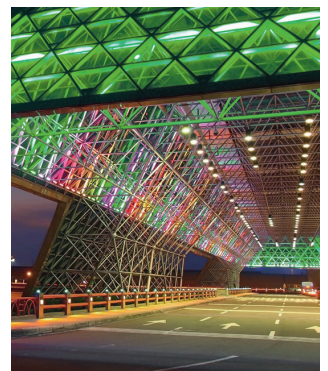

INNOVATIVE RESEARCH AND DEVELOPMENT

Committed to the research and development of new products and materials, Elmet Technologies has a renowned research staff dedicated to advancing metals technology. To benefit customers, we continually invest and upgrade our manufacturing and analytical capabilities. Elmet Technologies evaluates the materials using characterization instrumentation complete with optical and electron microscopy and a complete chemical analysis lab. Advanced material modeling and simulation capabilities support the rapid development of new products and processes at Elmet Technologies.

Comprehensive applications laboratories

Thin Film Laboratory

- > Planar and rotary target deposition chamber
- > Co-Sputtering capability, rapid composition optimization
- > Thin film characterization physical and electrical

Advanced Engineering and R&D groups

- > Recognized leader in refractory metals technologies
- > Advanced engineers dedicated to machining and fabrication
- > Hundreds of patents and technical publications

Materials Processing Laboratory Research

- > Deformation process via rolling
- > Cold (CIP) and Hot Isostatic Press (HIP) to study pressing and assisted sintering
- > Thermal Treatment to study annealing and sintering processes

Elmet Technologies also provides services for precharacterization of materials for customers; for example, performance of material after high temperature anneal.

Metallurgical Laboratory

- > Optical microscopy
- > SEM with EDS1 and EBSD2
- > Mechanical testing

Extensive analytical capabilities

- > IGA³
- > ICP⁴
- > GDMS⁵



1 Energy Dispersive X-Ray Spectroscopy
2 Electron Backscatter Diffraction
3 Interstitial Gas Analysis

4 Inductively Coupled Plasma (Mass Spectroscopy)
5 Glow Discharge Mass Spectroscopy

POWDER METALLURGY AND VACUUM ARC CAST PRODUCTS

Both powder metallurgy and vacuum arc cast processing are employed by Elmet Technologies to yield the highest quality products. Our alloys are designed for furnace applications with the highest temperature utilization capabilities.

Molybdenum Products

> Powder Metallurgy (P/M)

Molybdenum is produced by compacting < 99.95 % pure powder into billets that are sintered and subsequently worked into finished wrought forms.

Only the highest commercially pure powders are used.



> Powder Metallurgy (P/M)

Products made by this process are available exclusively from Elmet Technologies. Arc cast wrought products exhibit excellent workability, weldability, and good machining characteristics with lower oxygen, greater ductility and fracture toughness relative to powder metallurgy.

In the vacuum arc melting process, 99.95 % minimum pure molybdenum powder with or without required additions is compacted, sintered, arc melted, and cast to produce an ingot weighing up to one ton. All these processes take place under vacuum.

MOLYBDENUM MILL PRODUCTS - POWDER METALLURGY

FORM	DIAMETER/THICKNESS INCHES	MM	WIDTH/LENGTH
Billets	1.250-30	32-762	Extruded
Forgings	*		Up to 50" / 10,000 lbs.
Rod & Bar	0.1250-8.4	3.2-213	8 - 25 ft
Plate	0.1875-2.0	4.8-50.8	24" (610 mm) max.; 2 to 10 feet **
Sheet	0.0050-0.187	0.127-4.80	24" (610 mm) max.; up to 200 feet
Foil	0.0010-0.0049	0.0254-0.12	1/8" to 12" (305 mm); Nominal 200 foot coils
Extruded Tube & Shapes	*		

* Submit size required for Elmet Technologies quotation

** Inquire for thickness x length x width combinations

Molybdenum Mill Products - Powder Metallurgy

> Pure Molybdenum > TZM

(99.97 % minimum) > MoW

FORM	DIAMETER/THICKNESS INCHES	MM	WIDTH/LENGTH
Ingots	6-12	152-304	
Forgings	Submit size required for Elmet Technologies quotation		
Rod & Bar	0.1250-6	3.2-152	
Plate	0.1875-2	4.8-50.8	24" (610 mm) max.; up to 10 feet
Sheet	0.0050-0.187	0.127-4.80	24" (610 mm) max.; up to 200 feet
Foil	0.0010-0.0049	0.0254-0.12	1/8" - 12" (305 mm); nominal 200 feet coils

Molybdenum Alloys

> PTZM Molybdenum Alloy

TZM (0.50 Ti, 0.08 Zr, balance Mo) is consolidated by either the P/M or vacuum arc-casting processes.

The titanium and zirconium carbides increase strength and creep resistance at elevated temperatures.

TZM molybdenum alloy also permits higher service temperatures without loss of toughness in comparison to pure molybdenum.

Arc cast material resists abrasion and is widely used for injection molding nozzles.

> MoW Alloy

Offering the only commercially available arc cast molybdenum and tungsten alloy with 70 wt. % Mo and 30wt. % W, Elmet Technologies' MoW alloy has demonstrated excellent service life in handling high purity molten zinc(99.99 % Zn).

Our Mo 75 wt. % and W 25 wt. % alloy has also been made via the P/M method for use as heat shields in furnaces.



Molybdenum

> MHC Alloy

MHC (1.2 % Hf, 0.1 % C) contains hafnium carbide, which is consolidated by the P/M process.


The high recrystallization temperature, high strength, low thermal expansion, and high thermal conductivity makes it ideally suited for die applications, particularly for brass extrusion.

> ODS MoLa Alloys

ODS MoLa contains lanthanum oxide (0.3 wt %, 0.6 wt. % and 1.1 wt. % lanthana) and is an oxide-dispersion strengthened material that contains a mixture of molybdenum with a very fine array or dispersion of lanthanum oxide particles.

ODS MoLa has extraordinary resistance to recrystallization, improved ductility, and high-temperature formability.

These materials are applied in environments requiring dimensional stability and strength at temperatures above the capabilities of either pure molybdenum metal or TZM alloy.



Tungsten

TUNGSTEN MILL PRODUCTS

Powder Metallurgy

> Pure tungsten metal powder is pressed and sintered into an ingot for hot and cold rolling.

> The material is 99.95 % minimum pure tungsten and is normally supplied as-rolled or cut to shape parts.

Tungsten and Alloy Mill Products - Powder Metallurgy

> Pure tungsten (99.95 % minimum purity)

FORM	DIAMETER/THICKNESS INCHES	MM	WIDTH/LENGTH
Plate	0.1875-1.0	4.8-25.4	24" (610 mm) max.; up to 10 feet
Sheet	0.0050-0.187	0.127-4.80	24" (610 mm) max.; 5 to 30 feet
Foil	0.0010-0.0049	0.025-0.12	1/8" - 6" (1525 mm); 30 foot max.

PHYSICAL PROPERTIES - MOLYBDENUM, TANTALUM, AND TUNGSTEN

PHYSICAL PROPERTIES	UNIT	MOLYBDENUM	TANTALUM	TUNGSTEN
Typical Commercial Purity		99.95 %	99.9 %	99.95 %
Specifications	ASTM	B-386	B-364	B-760
Density	g/cc	10.2	16.6	19.3
	lbs/cu inch	0.369	0.600	0.697
Melting Point	Celcius	2623	3017	3422
	Fahrenheit	4753	5463	6192
Boiling Point	Celcius	4612	5425	5644
	Fahrenheit	8335	9797	10211
Typical Hardness	DPH (Vickers)	230	200	310
Thermal Conductivity @ 20 °C	W/m*K	138	57.5	173
Coefficient of Thermal Expansion @ 25 °C	µm/m*K	4.8	6.3	4.5
Electrical Resistivity @ 20 °C	nΩ-m	53.4	131	52.8
Electrical Conductivity	% IACS	34	13.9	31
Tensile Strength MPa	Ambient	825-1380	240-283	700-3400
	500 °C	240-586	172-310	924
	1000 °C	138-207	90-117	350-525
Modulus of Elasticity GPa	Ambient	311	186	407
	500 °C	283	172	379
	1000 °C	269	152	345

FABRICATING AND MACHINING: CENTER OF EXCELLENCE

FLAT SHEET

> Molybdenum (Mo), MoLa and TZM Alloys

Benefits:

- High melting temperature refractory, lower cost than Tungsten, creep resistance, and high temperature mechanical properties


> Tungsten (W)

Benefits:

- Highest melting temperature refractory, creep resistance, and high temperature mechanical properties


MOLYBDENUM

Hardness versus Anneal Temperature

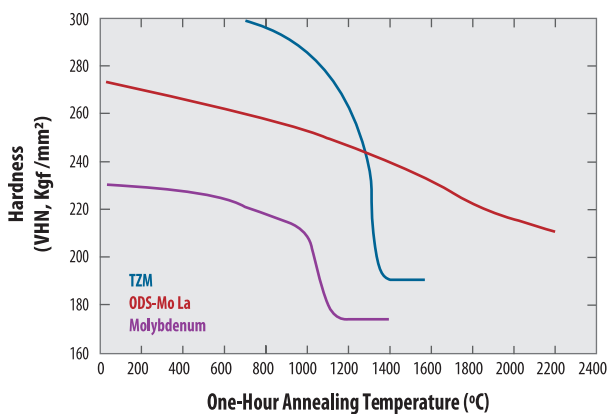

MOLYBDENUM

Tensile Strength versus Temperature

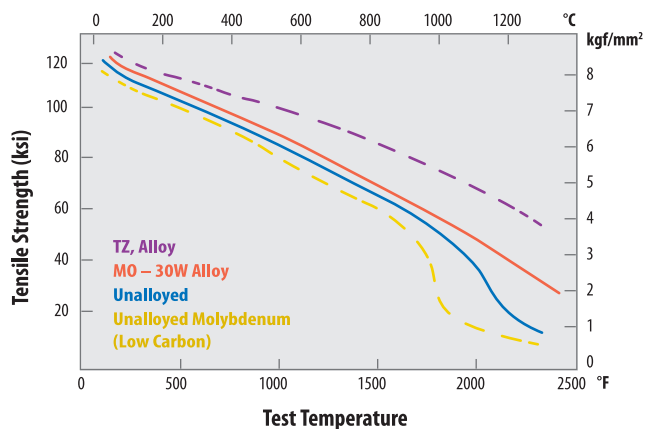

*Typical Tensile Properties for indicated Products (5/8 inch Diameter bars)

FLAT PLATE

> Molybdenum (Mo, MoLa, TZM, W Alloys)

Application: Hearth plates, pusher furnace carriers

Benefits:

- High melting temperature, creep resistance, high temperature mechanical properties

FABRICATIONS

> FURNACE RACK (Mo, MoLa, TZM, W)

Application: High temperature furnace fixtures

Benefits:

- Developed per Print: Sheet length x width and plate length x width are main constraints on design
- Support product in high temperature furnaces
- High melting temperature, creep resistance at elevated temperatures
- Chemical resistance (Ta)

> ROLL FORMED PRODUCT (Mo, MoLa, TZM, W)


Application: High temperature furnace shielding and heating elements

Benefits:

- Developed per Print:
Roll Forming: 60" long x 0.040" thick max. x mill width
- Cut or formed to desired shape

MOLYBDENUM

Thermal Expansion versus Temperature

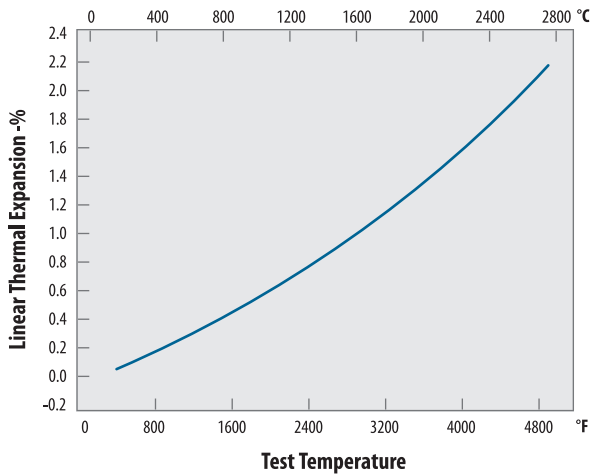

> FURNACE BOATS and TRAYS (Mo, MoLa, TZM)



Application: High temperature furnace boats, powder sintering, nuclear fuel processing, furnace support fixtures

Benefits:

- Cut or formed to desired shape

MOLYBDENUM

Thermal Conductivity versus Temperature

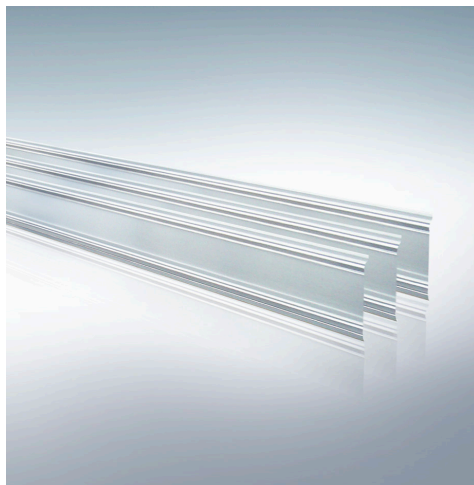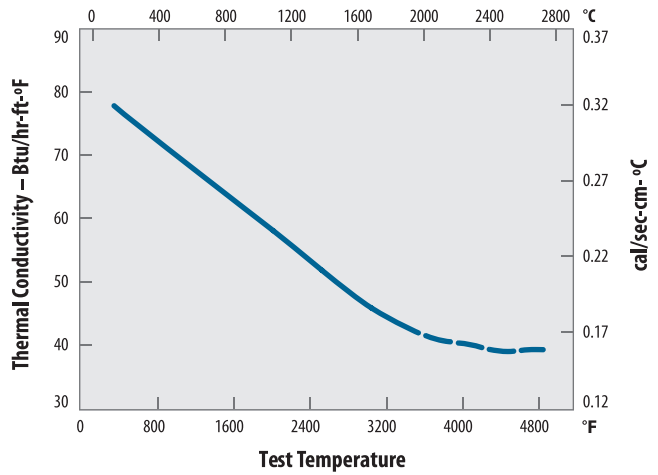

> BENT AND ROLLED PIECES – Brackets and Shielding(Mo, MoLa, TZM, W)


Application: Furnace heating elements, shield brackets, support fixtures, hangers, fasteners, and baffles

Benefits:

- Developed per Print:
Mo, MoLa, TZM up to 0.5" thick
W up to 0.125" thick
- Customize other thicknesses per customer request
- Furnace support structures
- Can be cut or formed to desired shape

MOLYBDENUM

Specific Heat versus Temperature

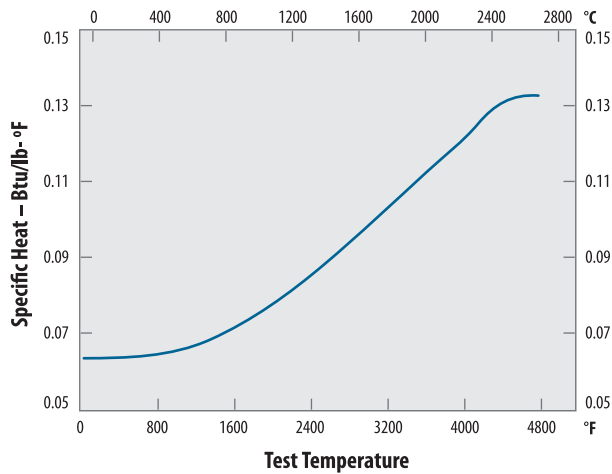

> FURNACE BOATS and TRAYS (Mo, MoLa, TZM)

Application: High temperature outer furnace shielding


Used to insulate the outer walls of the furnace from higher temperatures within the furnace. Hot zones may become brittle after repeated temperature exposure due to recrystallization.

Benefits:

- Developed per Print:
Common Joining Methods for fabricating: Wire staples,pins, wire nuts, rivets (Mo & W)
Common Spacers: Coiled wire spacers, rod or ribs (Mo & W)
- Can also include stainless steel in outer layers, if application
- Can be cut or formed and assembled to desired shape

MOLYBDENUM

Electrical Resistivity versus Temperature

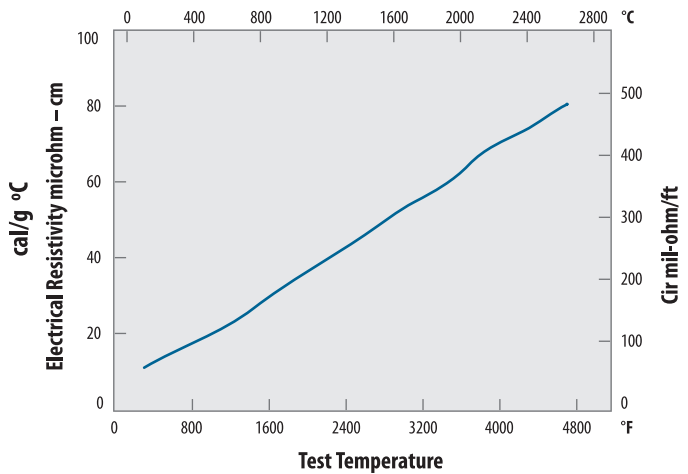

> HEATING ELEMENT (Mo, MoLa, TZM, W)

Application: Furnace Heating element for high temperature furnaces

Benefits:


- Can be cut or formed and assembled to desired shape
- Used as heating medium in the furnace
- W and Mo can operate in vacuum or inert gas atmospheres
- W, Mo, and MoLa cannot be used in air atmosphere

REFRACTORY METAL PRODUCTION PROCESSES

MOLYBDENUM PROCESS

- > Uniform gauge control
- > Controlled flatness
- > Precision machining (5 Axis)
- > Laser and Water Jet cutting


- > Riveting
- > In-house expertise for extrusion and rotary forging
- > Copper and nickel cladding of Molybdenum

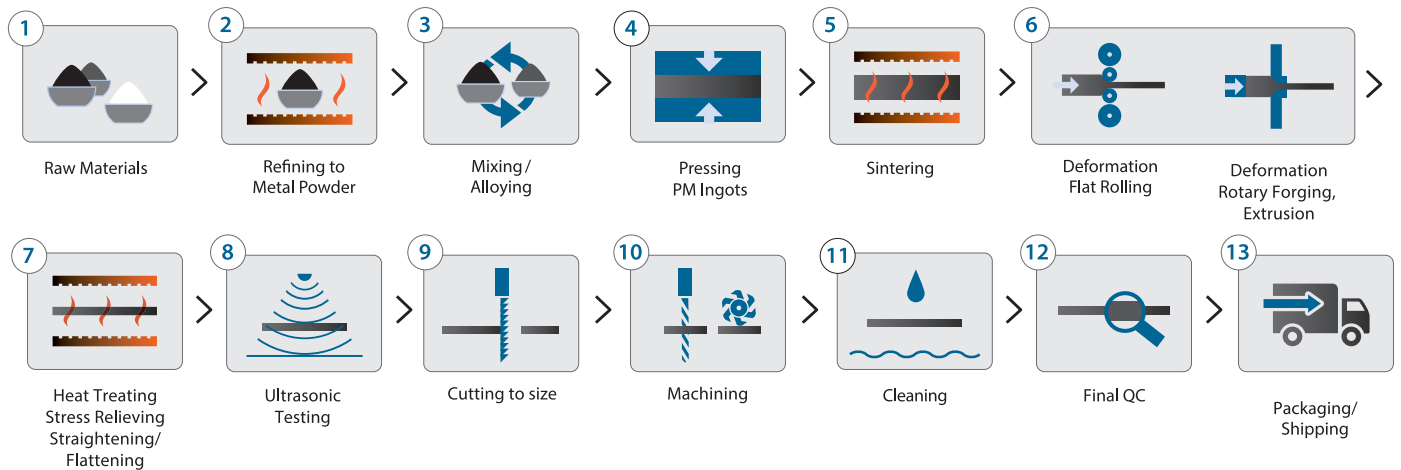

TUNGSTEN PROCESS

- > Fully integrated supply chain
- > Controlled flatness
- > Water jet cutting

- > n-house expertise in rolling operations
- > Uniform gauge control

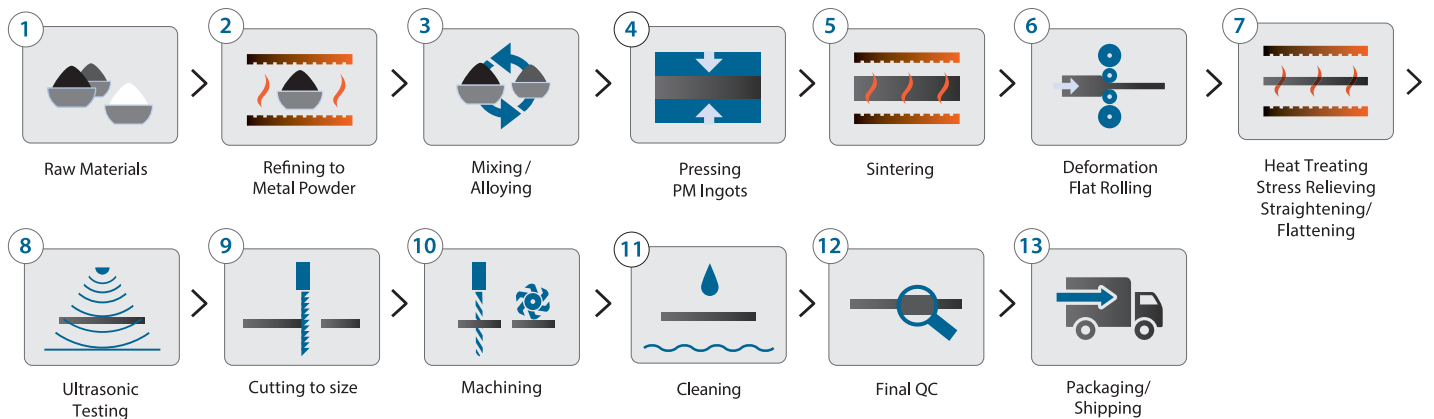


NIOBIUM PROCESS

> In-house expertise in forging, rolling, machining, cutting and fabrication

> Expertise in thermal processing

> Chemical, mechanical, and microstructure monitoring in-house

> Consistent grain size and texture control

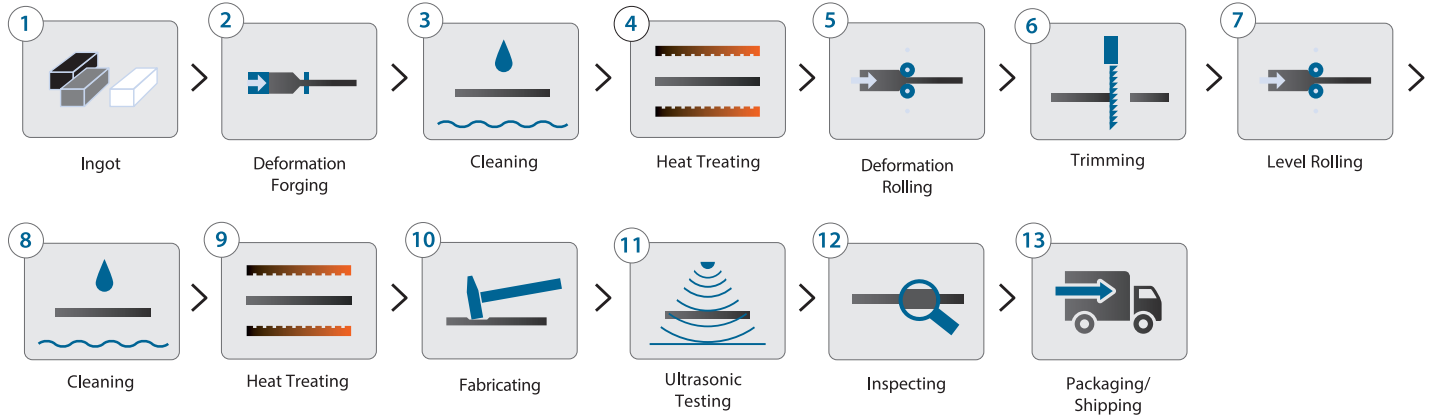

ELMET TECHNOLOGIES' SECURE MATERIAL SUPPLY CHAIN

Elmet Technologies' Responsible Supply Chain Management System (RSCM) contributes to its reliable and secure supply chain through the procurement of raw materials that ensures efficient and competitive purchasing. RSCM helps to avoid sourcing from conflict regions in the world or from suppliers that do not act in line with environmental and social sustainability. The RSCM system fulfills all requirements of a management system standard required by ISO and has been confirmed by the external auditor, Bureau Veritas.

Elmet Technologies is one of the first companies to pass a second consecutive audit under the Conflict-Free Smelter (CFS) Validation Program introduced in 2010. The program, created and driven by the electronics industry, is being recognized and adapted by many metal industries determined to eliminate unethical sources of raw material from their supply chains. The term "conflict minerals" applies to minerals (including tantalum, tin, tungsten and gold) that have originated in conflict regions where production and trade is closely connected with ongoing abuse of human rights.

In addition to the securing a conflict-free raw material supply chain, Elmet Technologies recycles spent materials for our customers. A recognized leader in Green Technology, Elmet Technologies is a founding member

of the Center for Resource Recovery and Recycling (CR3) coalition. Elmet Technologies was also awarded the Sony "Green Partner" certification, one of the best established programs of its kind, and is a gold standard of the electronics industry. Elmet Technologies' treats sound environmental standards, robust supply chain, energy efficiency and recycling as foundational pieces of our strategy.



ELMET
TECHNOLOGIES

ELMET TECHNOLOGIES

1560 Lisbon Street • Lewiston, Maine 04240

P +1.207.333.6100

sales@elmettech.com

www.elmettechnologies.com

The conditions of your use and application of Elmet Technologies products, technical assistance, and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, is your responsibility. Therefore, you are encouraged to test our products and review any technical assistance and/or information you may receive from Elmet Technologies with your own resources, and determine to your own satisfaction whether Elmet Technologies products are suitable for your intended uses and applications. This application-specific analysis should include at minimum testing to determine suitability for the intended use from a technical as well as health, safety, and environmental standpoint. Any technical assistance and/or information provided by Elmet Technologies is given without any express or implied warranty or guarantee. You agree and understand and hereby expressly release Elmet Technologies from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance and/or information, except as may be contained otherwise in a written agreement between you and Elmet Technologies. Any statement or recommendation not contained herein or in a written agreement between you and Elmet Technologies is unauthorized and shall not bind Elmet Technologies. Nothing herein shall be construed as a recommendation to use any Elmet Technologies products in a manner violative of the intellectual property rights of any third party. No license is implied or granted under or to Elmet Technologies intellectual property. All product deliveries are based on the then current product specification and Elmet Technologies' Conditions of Sale. IN NO EVENT WILL ELMET TECHNOLOGIES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.