

MOLYBDENUM ARC-CAST PRODUCTS

MOLYBDENUM ALLOY TZM AFBT


Arc-Cast Forging Billet

This specification covers carbon-deoxidized TZM alloy. (Molybdenum + 0.5 % titanium + 0.08 % zirconium) wrought forging billets produced from ingots consolidated by the Elmet Technologies consumable electrode vacuum-arc-casting process.

CHEMICAL CHARACTERISTICS¹

(Mass fraction in % [cg/g]; ppm [μ g/g])

Mo (By Difference)	min.	99.25 %
Ni	max.	0.002 %
*N	max.	0.002 %
*O	max.	0.0025 %
Fe	max.	0.008 %
Si	max.	0.008 %
C	0.01 -	0.030 %
Zr	0.06 -	0.12 %
Ti	0.40 -	0.55 %

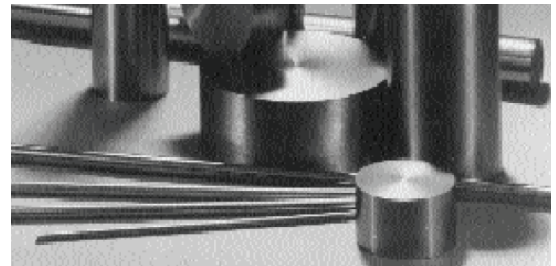

ARC-CAST PRODUCTS

*Unless method of analysis is agreed upon, deviations from these limits alone shall not be cause for rejection.

MECHANICAL PROPERTIES

The billets will be supplied in the recrystallized condition, with a maximum hardness of 215 B.H.N. (10 mm ball/1500 kg/30 sec.). Material can be supplied in the stress-relieved condition upon request.

DIMENSIONAL TOLERANCE

The diameter of each billet will be uniform along its length within $\pm 1/16$ inch. Any variation in diameter will be smoothly blended into adjacent areas.

¹ Information on testing methods on request.

SURFACE CONDITION

Billets will be supplied with machined or chemically cleaned surfaces. Minor surface imperfections revealed by dye penetrate inspection may be removed by conditioning to a maximum depth of 0.090 inch. The internal integrity of all billets will be determined by ultrasonic inspection and shall satisfy Elmet Technologies Ultrasonic Specification No. (latest revision).

IDENTIFICATION

All billets will be identified with an appropriate ingot number. Each shipping container will be marked with the name of the customer and the purchase order number.

Hazards identification in Advertising (Directive 67/548/EEC Article 26, Directive 1999/45/EC Article 13 and REGULATION (EC) No 1272/2008 Article 48) none.

REPORTS

Shipments will be accompanied by documents which indicate the applicable specification number, purchase order number, ingot number, chemical analyses and hardness.

REJECTION

Elmet Technologies must receive written notification of rejected material with the reason for rejection. The right is reserved to inspect rejected material at customer plant for claim validation. The material may be returned only after proper authorization.



ELMET TECHNOLOGIES

1560 Lisbon Street • Lewiston, Maine 04240

P +1.207.333.6100

sales@elmettech.com

www.elmettechnologies.com

The conditions of your use and application of Elmet Technologies products, technical assistance, and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, is your responsibility. Therefore, you are encouraged to test our products and review any technical assistance and/or information you may receive from Elmet Technologies with your own resources, and determine to your own satisfaction whether Elmet Technologies products are suitable for your intended uses and applications. This application-specific analysis should include at minimum testing to determine suitability for the intended use from a technical as well as health, safety, and environmental standpoint. Any technical assistance and/or information provided by Elmet Technologies is given without any express or implied warranty or guarantee. You agree and understand and hereby expressly release Elmet Technologies from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance and/or information, except as may be contained otherwise in a written agreement between you and Elmet Technologies. Any statement or recommendation not contained herein or in a written agreement between you and Elmet Technologies is unauthorized and shall not bind Elmet Technologies. Nothing herein shall be construed as a recommendation to use any Elmet Technologies products in a manner violative of the intellectual property rights of any third party. No license is implied or granted under or to Elmet Technologies intellectual property. All product deliveries are based on the then current product specification and Elmet Technologies' Conditions of Sale. IN NO EVENT WILL ELMET TECHNOLOGIES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.