

MOLYBDENUM POWDER PRODUCTS  
**PURE MOLYBDENUM RTP**  
**Powder (99.95%)**

This specification covers Ready-to-Press molybdenum powder, which is a uniformly agglomerated pure molybdenum powder designed for uniform mold filling and high pressed and sintered density. The powder contains an organic binder. The agglomerates are porous spheres and are free flowing.

**CHEMICAL CHARACTERISTICS<sup>1</sup>**

(Mass fraction in % [cg/g]; ppm [µg/g])

<b>Mo</b> <i>(excluding O and C)</i>	<b>min.</b>	<b>99.95 %</b>
O	max.	1.1%
C	max.	1.1%


**PHYSICAL CHARACTERISTICS**

Apparent Density 1.6 - 2.3 g/cm<sup>3</sup> (27 - 37 g/inch<sup>3</sup>)

Hall Flow max. - 35 s/50 g

**Sieve Analysis**

+ 150 µm (+ 100 mesh) max. 2.5 %  
 - 45 µm (- 325 mesh) max. 10 %

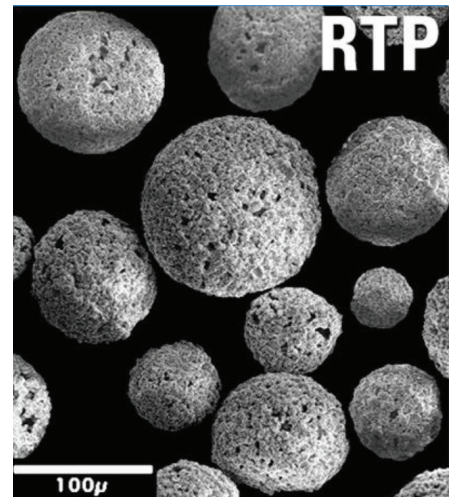

<sup>1</sup> Information on testing methods on request.

## PACKAGING

The molybdenum powder is shipped in non-returnable polyethylene-lined 20 l (5-gallon) plastic pails or 60 l (15-gallon) steel drums. Special packaging inquiries welcome.

## STORAGE AND HANDLING

Storage and handling are subject to the rules and regulations in the country of use.

**Hazards identification in Advertising (Directive 67/548/EEC Article 26, Directive 1999/45/EC Article 13 and REGULATION (EC) No 1272/2008 Article 48) none.**



### ELMET TECHNOLOGIES

1560 Lisbon Street • Lewiston, Maine 04240

P +1.207.333.6100

sales@elmettech.com

www.elmettechnologies.com

The conditions of your use and application of Elmet Technologies products, technical assistance, and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations, is your responsibility. Therefore, you are encouraged to test our products and review any technical assistance and/or information you may receive from Elmet Technologies with your own resources, and determine to your own satisfaction whether Elmet Technologies products are suitable for your intended uses and applications. This application-specific analysis should include at minimum testing to determine suitability for the intended use from a technical as well as health, safety, and environmental standpoint. Any technical assistance and/or information provided by Elmet Technologies is given without any express or implied warranty or guarantee. You agree and understand and hereby expressly release Elmet Technologies from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance and/or information, except as may be contained otherwise in a written agreement between you and Elmet Technologies. Any statement or recommendation not contained herein or in a written agreement between you and Elmet Technologies is unauthorized and shall not bind Elmet Technologies. Nothing herein shall be construed as a recommendation to use any Elmet Technologies products in a manner violative of the intellectual property rights of any third party. No license is implied or granted under or to Elmet Technologies intellectual property. All product deliveries are based on the then current product specification and Elmet Technologies' Conditions of Sale. IN NO EVENT WILL ELMET TECHNOLOGIES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.